

IN Wall Smart Scket

User Manual



amazon alexa

works with Google Assistant

Specifications

Model: SWPPD86-01OG/SEPPD86-01FOG
 Input voltage: AC 100-240V
 Rated Frequency: 50/60Hz
 Max Current: 16A
 Max Power: 3000W
 Output: DC 20W Max
 USB-A: DC5V/3A, 9V/2A, 12V/1.5A
 USB-C: DC5V/3A, 9V/2.22A, 12V/1.67A
 USB-A + USB-C: 5V/3.4A Max
 Remote Control: Bluetooth
 WIFI: IEEE 802.11 b/g/n
 Wireless standard: Wi-Fi 2.4G

CE RoHS

1. Product Introduction

The lighting fixture controlled by the Wi-Fi in-wall smart socket must not exceed 3000 watts. The smart socket is designed only for single-pole use and Neutral Wire required.

1.1 Indicator description

- Red light:** the state of the smart socket is on
- Blue light:** the smart socket is off
- Green light:**
 - Wi-Fi distribution network indicator
 - Remote control matching indicator light

1.2 Method of restoring factory state

Press and hold the smart socket button for 10 seconds until the smart socket indicator is blinking.

Remote pairing and deletion methods(UK)

One smart socket switch can be paired with four remotes at most. One remote key can only control one smart socket.

1. How to pair the remote with smart socket?

Step 1. Press and hold the smart socket button for 5 seconds until the socket indicator change to blinking slowly
Step 2. Press and hold the remote key "A" or "B" until the smart socket indicator stop blinking, paired successfully.

2. How to delete the remote with smart socket?

Press and hold the remote key for 10 seconds until the smart socket indicator flashes rapidly for 2 seconds, release your finger, then the paired key is invalid now.

2. Smart Socket Installation

2.1 Tools you need

Screwdriver Pliers Electrical Tester

2.2 Connect the Smart Socket wires

Ground Neutral (Required)
Live/Line

IMPORTANT: Make sure the power is turned OFF before you proceed. Your existing wires may have different colors than those shown.

3. Install APP

Simplified steps to install the smart life App on your smart device and pair with Amazon Alexa and Google Assistant using smart life App on Apple Store or Google Play marketplace. Compatible with any smart phone or tablet including both Android and IOS systems.

3.1 Download Smart life App

Download smart socket from Apple Store or Google Play Store or scan the QR code below to install the smart life APP for either iOS or Android.

3.2 Register an account in Smart life APP

- Open smart life APP into account registration page, click on the "Register"
- At the registration page, select your region and enter the email to create a new account.(Phone number is not available)
- After successful registration, you can add device on your APP now.

4. Add devices

4.1 Add New WiFi Device

- Connect your phone to the local WiFi
- Press the switch button for 10 seconds till the light flashes to reset
- Tap on "+" in the homepage of your "Smart Life" App and select "Smart Socket"
- Enter WiFi password and confirm
- Wait until the configuration is complete

4.2 Add New ZigBee Device

- Ensure that the device is in fast flashing state
- Open the Tuya ZigBee Smart Gateway
- In the ZigBee smart gateway click to add a sub-device
- Discover the device and add it, the addition is successful

Step 3. Active the smart socket to Wi-Fi connection mode

smart life APP supports two types of configuration modes: EZ mode and AP mode.




EZ mode: Turn off the luminaire first. The socket indicator will be blue. Press and hold the socket button for 10 seconds and release. The indicator light will blink rapidly. [About twice per second].

AP mode: Under EZ mode, continue to press and hold the socket button for 10 seconds and release, the socket indicator will blink slowly. [About once 2 seconds]. If the socket can not be paired in EZ mode [blink rapidly], please change to AP mode [blink slowly]. After entering the "Add Device" page, confirm whether the Smart Socket is EZ mode.

Step 4. "Device added Successfully" will be displayed after a successful operation.

5. Control Your Smart Socket with Amazon Alexa/Google Assistant

After the device be added successfully, click the device description text to modify device name. The name of the device is recommended to use easy pronunciation of the English words.

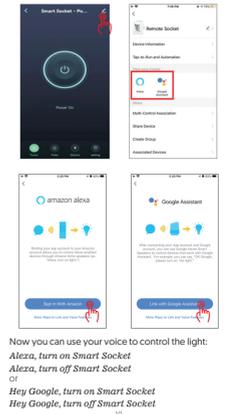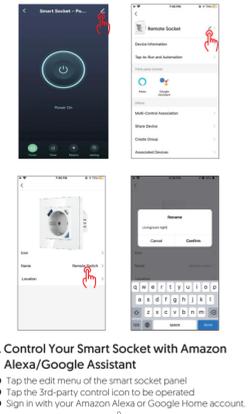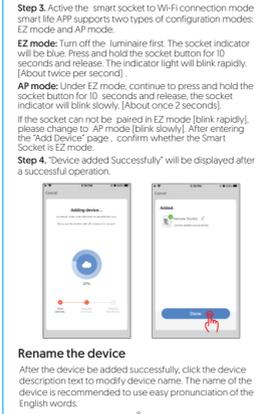

Now you can use your voice to control the light:
 Alexa, turn on Smart Socket
 Alexa, turn off Smart Socket
 or
 Hey Google, turn on Smart Socket
 Hey Google, turn off Smart Socket